


Sales Bulletin


April 17, 2013

FinnCut for quick and safe shearing of the non steel reinforced hoses, providing clean cut every time. Dual cut mandrel allows cutting two hoses simultaneously in a production environment where larger volumes are needed.

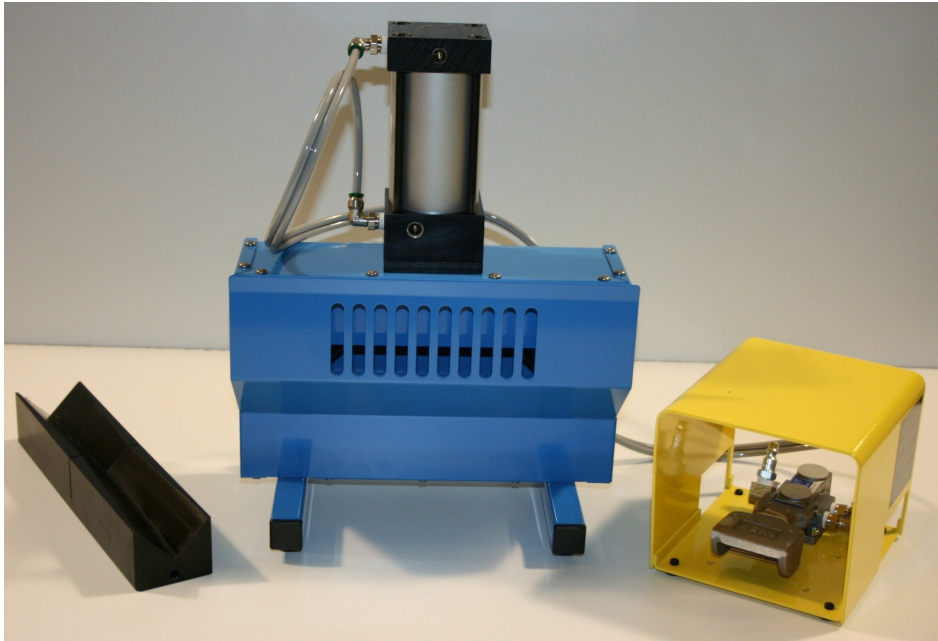

Cutting process is air operated with integrated safety clamps holding the hose to eliminate the hose sliding while cutting, thus maintaining good edge quality. Hose for cutting can be easily positioned through the safety access panel from the front of the machine.

Measuring the hose length is made easy and simple from the edge of the **FinnCut** machine.

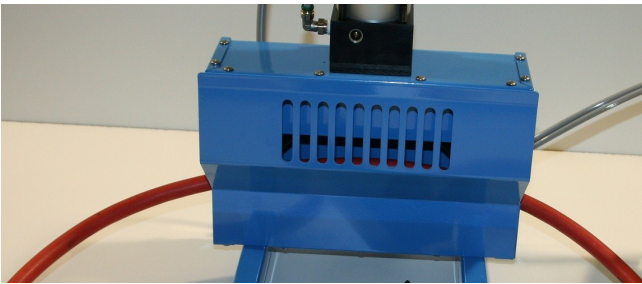

FinnCut machine includes one cutting blade and two die mandrels, one for single hose with larger guide V groove and one with twin guide V grooves for double cut by single hit.



The cutting cycle is activated from the included foot pedal, one cutting hit at time.

Lillbacka USA

1269 Prime Ct Suite 400
Orlando, FL 32809
sales@lillbackausa.com
1-847-301-1300

WWW.LILLBACKAUSA.COM